| REVISION | | | | | |
|---|---|---|---|---|---|
| ZONE | REV | DESCRIPTION | DATE | CHANGED BY | APPROVED |
| | E | ECO-15569 | 02/27/2026 | TDUFRENE | DGUST |

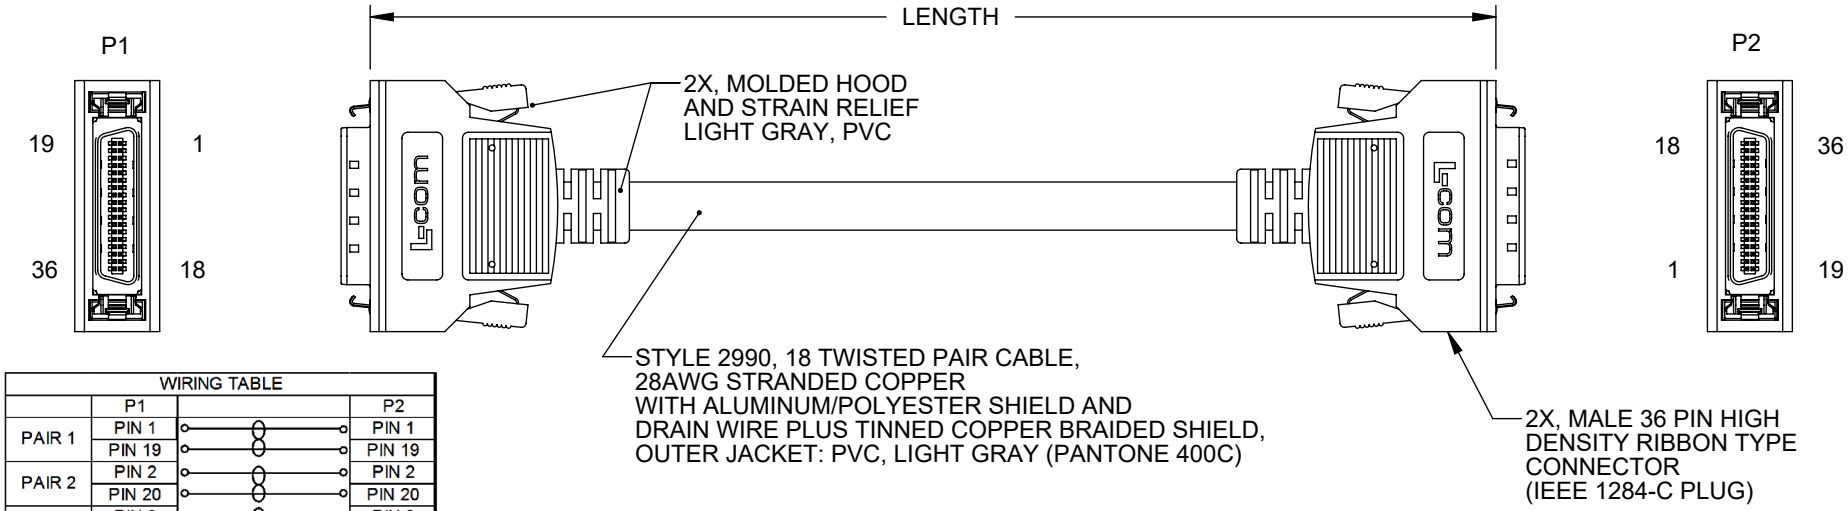


| WIRING TABLE | | |
|---|---|---|
| | P1 | P2 |
| PAIR 1 | PIN 1 | PIN 1 |
| | PIN 19 | PIN 19 |
| PAIR 2 | PIN 2 | PIN 2 |
| | PIN 20 | PIN 20 |
| PAIR 3 | PIN 3 | PIN 3 |
| | PIN 21 | PIN 21 |
| PAIR 4 | PIN 4 | PIN 4 |
| | PIN 22 | PIN 22 |
| PAIR 5 | PIN 5 | PIN 5 |
| | PIN 23 | PIN 23 |
| PAIR 6 | PIN 6 | PIN 6 |
| | PIN 24 | PIN 24 |
| PAIR 7 | PIN 7 | PIN 7 |
| | PIN 25 | PIN 25 |
| PAIR 8 | PIN 8 | PIN 8 |
| | PIN 26 | PIN 26 |
| PAIR 9 | PIN 9 | PIN 9 |
| | PIN 27 | PIN 27 |
| PAIR 10 | PIN 10 | PIN 10 |
| | PIN 28 | PIN 28 |
| PAIR 11 | PIN 11 | PIN 11 |
| | PIN 29 | PIN 29 |
| PAIR 12 | PIN 12 | PIN 12 |
| | PIN 30 | PIN 30 |
| PAIR 13 | PIN 13 | PIN 13 |
| | PIN 31 | PIN 31 |
| PAIR 14 | PIN 14 | PIN 14 |
| | PIN 32 | PIN 32 |
| PAIR 15 | PIN 15 | PIN 15 |
| | PIN 33 | PIN 33 |
| PAIR 16 | PIN 16 | PIN 16 |
| | PIN 34 | PIN 34 |
| PAIR 17 | PIN 17 | PIN 17 |
| | PIN 35 | PIN 35 |
| PAIR 18 | PIN 18 | PIN 18 |
| | PIN 36 | PIN 36 |
| SHIELD | | SHIELD |

NOTES:

1. CABLE ASSEMBLY SHALL MEET THE REQUIREMENTS OF IEEE-1284 STANDARDS.
2. HOOD MOLDINGS HAVE 360° METAL FOIL SHIELD.
3. CONNECTORS HAVE CLIP LATCHES TO ENGAGE MATING DETAILS ON FEMALE CONNECTORS.
4. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
5. CABLE ASSEMBLY SHALL BE PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE: CE2011/65/EU(RoHS DIRECTIVE)

| MODEL NUMBER | LENGTH | |
|---|---|---|
| | METERS | FEET |
| CSM84CC-1M | 1.0 | 3.28 |
| CSM84CC-2M | 2.0 | 6.56 |
| CSM84CC-3M | 3.0 | 9.84 |
| CSM84CC-5M | 5.0 | 16.40 |
| CSM84CC-10M | 10.0 | 32.81 |

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:

.X = ±.2 [5]
.XX = ±.02 [0.5]
.XXX = ±.005 [0.13]

FRACTIONS ± 1/32
ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

L-com®
an INFINITE brand
Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

| SCALE | SHEET |
|---|---|
| NONE | 1 OF 1 |

DESCRIPTION
CBL, IEEE1284 HP36M/M

| SIZE | CAGE CODE | DRAWN BY | ITEM NO. | REV |
|---|---|---|---|---|
| A | 43321 | TJC | CSM84CC | E |

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

LC LG Rev-D5 Asize